


TECHNICAL DATA




Colors

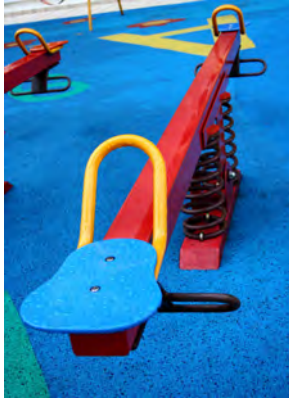


Black

Blue

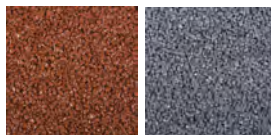


Red

Gray

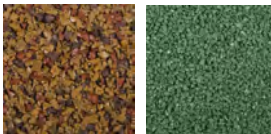


Earth

Green

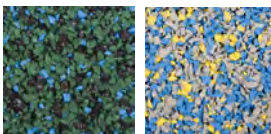


Green Fields

Sunburst

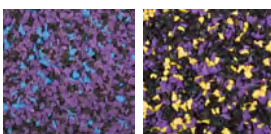

Purple Mountain

Cosmic



Fiesta

Hawaiian

Description

Kid Krete playground safety surfacing is a resilient surfacing designed to provide head impact attenuation (fall safety) up to a height of 10 feet

Kid Krete playground safety surfacing is manufactured from 80% post-consumer waste tires / 20% virgin EPDM and provides an exceptionally durable, safe, low maintenance option to Engineered Bark, Gravel or Sand.

Uses

Kid Krete is ideally suited to improve the beauty, comfort and ease of maintenance in various environments including daycare centers, playgrounds, community centers, schools and more.

Advantages

- **Kid Krete** playground safety surfacing is tested to ASTM F1292 for head impact attenuation up to fall heights of 10 feet.
- **Kid Krete** safety surfacing is ADA compliant and meets ASTM and CPSC requirements.
- **Kid Krete** playground safety surfacing is water permeable providing a fast drying surface easily permits surface water to drain per the construction design.
- **Kid Krete** playground safety surfacing is environmentally friendly, made from 80% California recycled waste tires diverting as many as 2.5 tires per 4 square feet from our landfills.
- **Kid Krete** playground safety surfacing is safe for our children containing no toxic materials and certified to be 100% steel free.



Advantages (Continued)

- **Kid Krete** playground safety surfacing is skid resistant providing a safe surface for our children whether wet or dry.
- **Kid Krete** playground safety surfacing is field poured making it conform to the largest selection of sub-grades including concrete, asphalt, and compacted gravel.
- **Kid Krete** playground safety surfacing is easy to maintain requiring only basic cleaning with a broom, vacuum or water hose on a regular basis.
- **Kid Krete** playground safety surfacing comes in a variety of colors providing a multitude of design options to meet any need.
- **Kid Krete** playground safety surfacing is backed by the industries leading manufacturer of rubber molded safety products and accessories and comes with a 1 Year Limited Material Warranty.

Physical Properties

Characteristic	Test	Result
Flame Spread:	ASTM E108	Class A
Flammability:	ASTM E648	Class II
Flammability:	ASTM 2859	Pass
Toxicity:	ASTM 2075	Lead Free
Slip Resistance:	ASTM F1677	Dry 0.63, Wet .052
Skid Resistance:	ASTM E303	Dry 96, Wet 47
Tensile Strength:	ASTM D412	1175.3 psi
Wear Resistance:	ASTM D3884	1.64% Loss/3000c
UV Resistances:	QPanel QUV	<3.0/4032 ksqm

Head Impact Attenuation

Product Thickness:

Certified Height:

2.50"	6 feet
3.50"	8 feet
4.25"	10 feet